


Natural Stone Resource Guide



**From
Backyards**

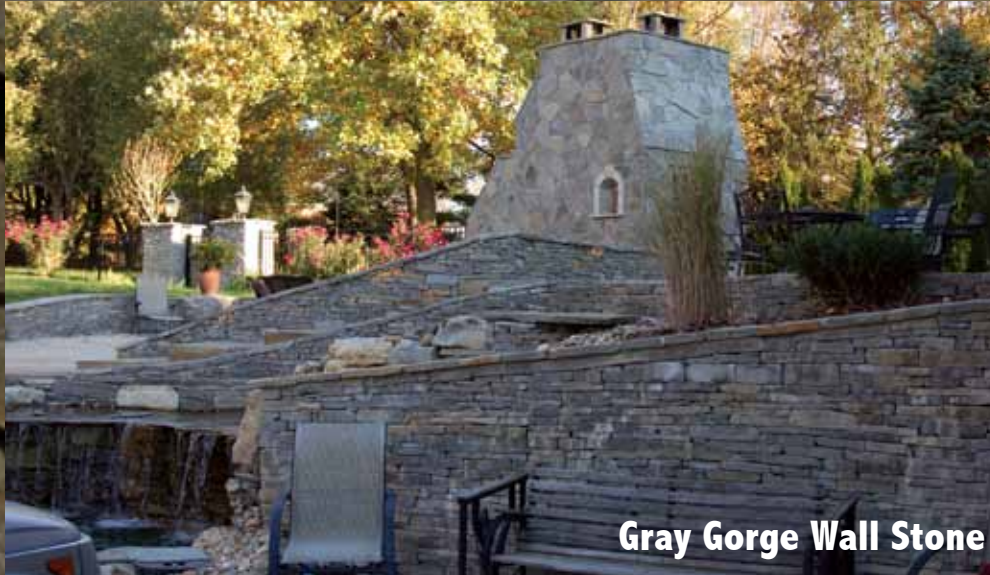

Gray Gorge Wall Stone

**To
Erosion
Control**



Southern Buff Outcroppings/Slabs



Canyon Gray Patio

**We Have
You Covered**





“Select” Natural Wall Stone



Tumbled Indiana Limestone
2" Weathered Edge
 # 101219



Rustic Buff
Select Thick 3" Wall Stone
 # 31150



Southern Buff
Select 3" Wall Stone
Natural Wall Stone # 41103

2" thick = 16-18 Square face feet per ton @ 12" high
 3" thick = 14-16 Square face feet per ton @ 12" high
 4" thick = 12- 14 Square face feet per ton @ 12" high
 5" thick = 29 - 31 linear footage per ton @ 1 course high

Lil Chunkies:

6" thick 10- 12 square face feet per ton @ 12" high

7" thick = 16 - 18 linear footage per ton @ 1course

Square face feet = Length x Height @ 12" high

2 Linear footage = Length @ 1 course high



Gray Gorge
Select 2" Wall Stone
 # 11102



Canyon Gray
Select Thick 3" Wall Stone
 # 51150



Gray Gorge Wall Stone used in retaining wall



Southern Buff Wall Stone used in retaining wall

Split/Cut Dry Wall Stone Tumbled and Non Tumbled



Canyon Gray
6" x 8" Cut Wall
51206



Indiana Limestone
3" x 8" Cut Wall Stone
101203



Indiana Limestone
Tumbled 3" x 8" Cut Wall Stone
101213

Canyon Gray 6" x 8" Cut Wall Fire Pit Kits

5'-6' Inside Diameter = 1 ton 6" x 8"

Cut Wall @ 2 Courses High

- A cutoff saw is recommended for tighter joints.

Also Available
3 Piece Bench Kits
in 3' and 4' Lengths

Kits also available
in Rustic Buff



3' bench
53253
4' bench
53254

53264

Steel Liner Required for Fire Pit Kits



Indiana Limestone
Tumbled 6" x 8" Cut Wall Stone
101216



Rustic Buff
5" x 8" Cut Wall Stone
31205

Cutwall (split) Wall Stone
Canyon Gray only

3" thick x 8" depth = 19-21 square face feet per ton
4" thick x 8" depth = 19-21 square face feet per ton
5" thick x 8" depth = 34 -38 linear feet per ton
6" thick x 8" depth = 17-19 square face feet per ton
or 34-38 linear footage per ton
6" thick x 12" depth = 10-12 square face feet per ton
or 20-22 linear footage per ton



Rustic Buff 5" x 8" Cut Wall used in retaining wall

Square face feet = Length x Height @ 12" high
Linear footage = Length @ 1 course high



Pathway & Patio Stone



**Gray Gorge
Steppers**
12120



**Gray Gorge
Thin Large Flagging**
12112



**Canyon Gray
Jumbo Flagging**
52113



**Rustic Buff
Jumbo Flagging**
32114



Southern & Rustic Buff Flagging



**Southern Buff
Reg. Large Flagging**
42113



Gray Gorge Flagging

Patio Stone Coverage

Steppers	= 1-2" thick	@ 90 – 110 square feet per ton
Small Flagging	= 2- 3" thick	@ 70 – 80 square feet per ton
Large Flagging	= 2-3" thick	@ 70 – 80 square feet per ton
Large Flagging	= 3- 4" thick	@ 55 – 70 square feet per ton
Jumbo Flagging	= 3.5- 4.5" thick	@ 45 – 55 square feet per ton

Coverage may vary depending on field conditions, depending on tightness of joints

4

Square feet = Length x Width

Veneer/Building Stone



**Canyon
Gray/Tan**
51240



**Indiana
Limestone**
101221



**Gray
Gorge**
11240



**Rustic
Buff**
31240



**Southern
Buff**
41240



Canyon Gray Veneer



**Gray Gorge
Web Wall**
11110



**Canyon Gray "Bulk"
Split Veneer-Rubble Building Stone**
51240

Veneer/Building Stone

Split Veneer/ Rubble = 2.5" – 7" thick x 4" deep (split) 35 – 45 square feet per ton

Natural Building Stone = 4 - 7" deep 25 – 35 square feet per ton

Web Wall = 50 – 65 square feet per ton

Split Rubble & Natural building stone is installed like wall stone with mortar joints

Web Wall is installed like Patio Stone with mortar joints

Square feet = Length x Width



Southern Buff Veneer



Natural Steps 4"-8" Thick



**Canyon Gray
Mini Steps 2' - 3'**
32101

**Canyon Gray
Jumbo Steps 5' - 6'**
52104



**Gray Gorge
Natural Steps
3' -4'**
12102




**Rustic Buff
Natural Steps
3' -4'**
32102



**Southern Buff
Natural Steps
3' -4'**
42102

*Rustic Buff
Natural
4" Landings
and Steps*

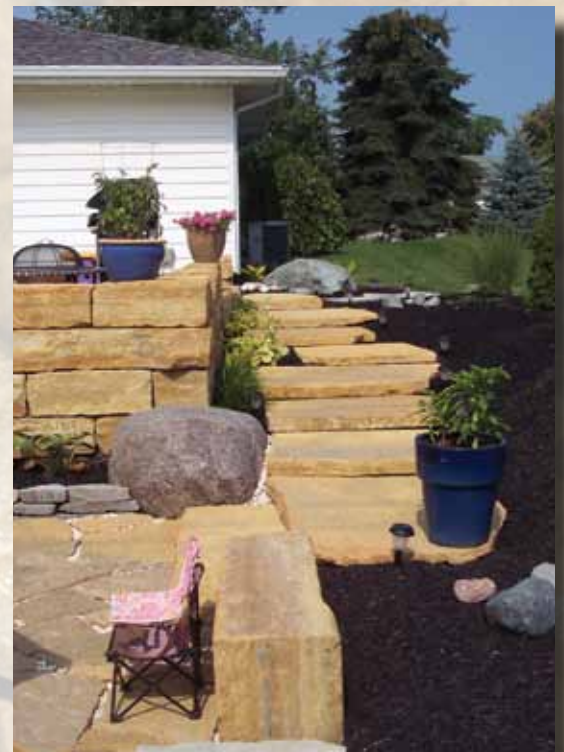

Natural & Snapped Step / Treads

Take height of incline in inches divided by thickness of step / tread to get correct number of step treads needed for specific job; note that less incline (% of slope) requires deeper bed depth for step treads.

Example: A slope (hill) which is 72 inches high (6 feet) would require 12 pieces of 6" step/ treads
(72 inches divided by 6 inches = 12 pieces)
Coverage may vary depending on field conditions & depth of stone used



Southern Buff 6"- 8" Slabs

Snapped/Split Steps & Pier Caps



Canyon Gray
36\"/>



102214

Indiana Limestone *6\"/>*

4 Stock Sizes

2' x 18\"/>

3' x 18\"/>

4' x 18\"/>

(Shown at Left)

5' x 18\"/>

Custom Sizes Available



Elliott's Indiana Limestone Pier Caps & Cut Wall



101234

Indiana Limestone *Snapped Face* *3\"/>*

Custom Sizes Available

18\"/>

20\"/>

24\"/>

26\"/>

28\"/>

(Shown at Left)

30\"/>

32\"/>

36\"/>



Canyon Gray 36\"/>

Custom products available through Elliot Stone Company include Rock Faced and Bullnosed Pier Caps, Treads, Sills, Coping, and Patterned Flagging. View their entire product line at

www.elliottstone.com



Thin Outcroppings/Slabs



Gray Gorge
6"- 8.5" Outcroppings
13106



Canyon Gray
6" - 8.5" Slabs
53106



Rustic Buff
7"- 8" Lil' Chunkies
33130



Rustic Buff Biege
6"- 8.5" Outcroppings
33156



Southern Buff
6"- 8.5" Outcroppings
43106

Lil Chunkies

6" thick 10- 12 square face feet per ton @ 12" high

7" thick = 16 - 18 linear footage per ton @ 1course

Outcroppings

4- 6" thick = 12 - 18 linear footage per ton

6- 8.5" thick = 10 - 15 linear footage per ton

8.5 - 9.5" thick = 7.5 - 12 linear footage per ton

9.5 - 10.5" thick = 6 - 10 linear footage per ton

10.5 - 12" thick = 4.5- 8 linear footage per ton

Outcroppings are smaller bed depth than slabs typically used for low retaining walls or accent landscapes.

Slabs are larger pieces of outcroppings typically used for Step/Treads or extremely high retaining walls face footage will be approximately ½ of above info

8 *Linear footage = Length @ 1 course high*



Rustic Buff Beige Outcroppings with Rustic Buff Chunks

Thick Outcroppings/Slabs

NEW!



Canyon Tan
16" Outcroppings/Chunks
63131



Canyon Gray
9.5" - 10.5" Slabs
53109



Southern Buff
8.5" - 9.5" Outcroppings
43108



Canyon Gray 6" - 10" & 20" Outcroppings/Slabs



Rustic Buff Beige
8.5" - 9.5" Outcroppings
33158



Canyon Tan 16" Outcroppings/Chunks



Rustic Buff
9.5" - 10.5" Slabs/Outcroppings **9**

33109



Benches and Chunks Stream Restoration, and



Rustic Buff
13"- 14" Benches
33140



Rustic Buff
13" - 14" Chunks
33131



51248

Canyon Gray
2 Sided Snapped
12" x 18" Building Blocks

Benches & Chunks
12 - 14" thick = 5 - 7 linear footage per ton
14 - 16" thick = 4 - 6 linear footage per ton
18 - 20" thick = 3 - 5 linear footage per ton
25" thick = 2 - 4 linear footage per ton

Building Blocks
12" thick x 12" depth = 11-13 LF per ton
12" thick x 18" depth = 8-10 LF per ton

*Linear footage (LF) =
Length @ 1 course high*



Southern Buff
12" Chunks # 43131



used for Landscaping, Erosion Control



**Canyon Gray
25" Chunks**
53133



**Southern Buff
22" -25" Thick Chunks**
43132



**Canyon Gray/Tan
Accent Boulders**
66101



**Gray Gorge
Boulders**
14101



16" Chunks
63131

25" Chunks
63133

**Canyon Tan
16" & 25" Chunks**



Canyon Tan 25" Chunks



*Canyon Tan Accent Boulders &
Chunks*



Canyon Gray 25" Chunks



Aggregates & Edging



Cobbles/River Jacks
4" - 8" or 6"-15"
Bulk or Bagged
04102



Canyon Tan

Decorative Aggregates

Available in 6 sizes
(Available bulk or bagged)
Extra Small # 55101
1/16" - 3/16" diameter
Small # 55102
1/8" - 3/8" diameter
(Shown at bottom)
Medium # 55103
3/16" - 1" diameter
Large # 55104
3/4" - 1.5" diameter
Extra Large # 55105
4" - 7" diameter
Jumbo # 55106
5" - 12" diameter



Indiana Limestone
6" x 5" Tumbled Edging
10" - 20" Lengths
101241



Canyon Gray Edging
6" x 5"
10" - 20" Lengths
51230

Rustic Buff Edging
5" x 5"
6" x 5"
10" - 20" Lengths
31230



*Rustic Buff Edging/Curbing
with Gray Gorge Flagging
(shown below and right)*

Rustic Buff Decorative Stackable Rip Rap (Available bulk or bagged)



Edging Planning Guide

3" = 95-100 Linear Footage Per Ton
4" = 85-90 Linear Footage Per Ton
5" = 70-75 Linear Footage Per Ton
6" = 55-60 Linear Footage Per Ton

Linear footage = Length @ 1 course high

YOUR AUTHORIZED OHIO STONE DEALER

